


# LQT400

## CONFIGURABLE MULTI TRANSDUCERFOR ALL ELECTRICAL NETWORKS

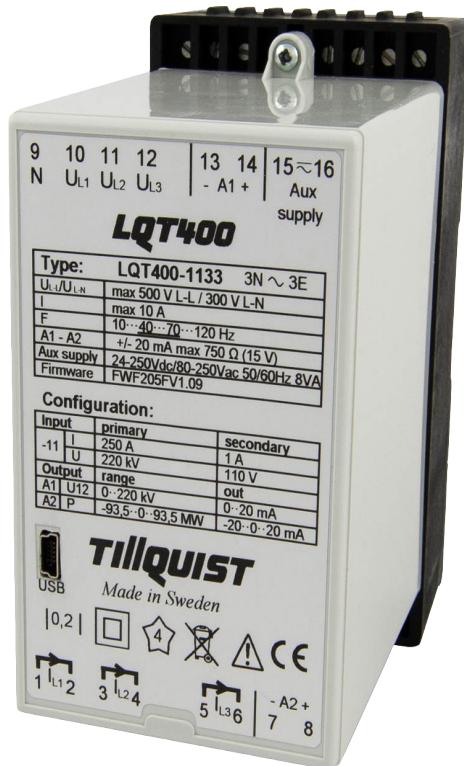

---

LQT400 is a configurable multi transducer for all electrical networks. Any two measurable electrical quantities can be linked to the two analog outputs.


---

The configuration is simple using "ConfigLQT" software through the USB port. The software is available and free to download on our web page.

---

## Model LQT400

<b>Input</b>	<b>Voltage</b>	
Voltage range (Un)	100 – 400 V main voltage (nominal)	
Measuring range	0 – 500 V TRMS	
Overload voltage	1.5 x Un – continuously, 2 x Un – 10 s	
Consumption	U x 1 mA / phase	
Frequency	10...40....70...120 Hz	
<b>Current</b>		
Current (In)	1 – 5 A	
Measuring range	0,0025 – 10 A TRMS	
Overload current	2 x In continuously, 10 x In 15 s, 40 x In 1 s	
Consumption	<0.05 VA / phase	
Supply voltage		
<b>Power supply</b>	24 – 250 VDC	
	80 – 250 VAC	
Burden	max 8 VA	
<b>Measuring Quantity</b>	U-main, U-phase, I, P, Q, S, F, PF, PA	
<b>Output</b>	<b>Analog</b>	
Analog output	2	
Range	+/- 20 mA	
External resistance load	max 750 ohm (15V)	
Response time	<100 msec	
<b>General data</b>		
Accuracy	0.2	
Galvanic isolation	Supply, in- and output are galvanically isolated	
USB	1 port for configuration	
Temperature	-10...+55 °C (operation), -40...+70 °C (storage)	
	Temperature coefficient less than 0.1% / 10 °C	
Test voltage	4 kV AC / min	
Inputs	overvoltage cat. III	
Pollution degree	2	
Dimension (B x H x D)	70 x 132 x 137 mm – DIN-rail	
Weight	ca 0.5 kg	
Standards	SS-EN 60688 Transducers SS-EN 61010-1 Safety	

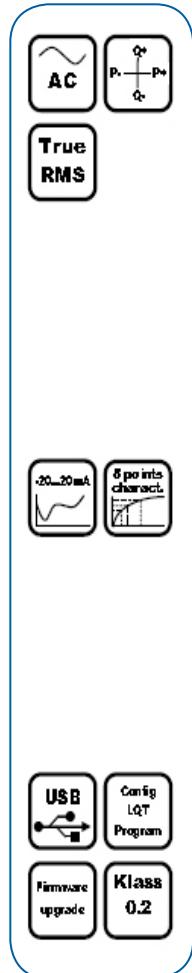

## Model LQT400

### Measuring Quantity

U-main, U-phase, I, P, Q, S, F, PF, PA

System-connection	Application	I1	I2	I3	N	U1	U2	U3	U12	U23	U31

