


<b>Q series</b>	<b>3/2 - G1/8 - body: aluminium</b>	<b>Q3B-A</b> page 1/2
-----------------	-------------------------------------	-----------------------

direct operated solenoid valves

coil 31 mm

general information	
ambient temperature	- 10°C to + 50°C
response time	6 - 18 ms
mounting	in any position
standard seal materials*	NBR, FPM, EPDM
dimensions	see page 2/2
coil data	see page 2/2
connector data	see page 2/2

\* other seal materials on request

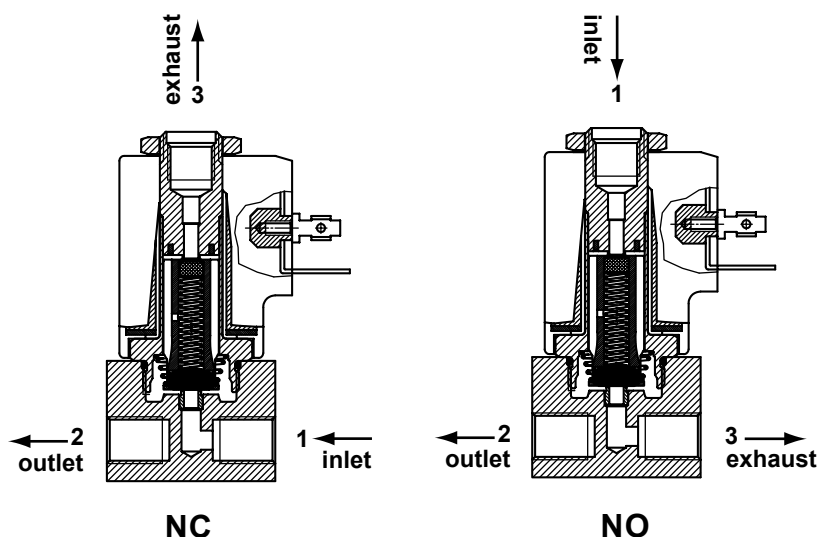

function	symbol	orif. mm	*Kv	pressure range (bar)			nominal power			TABLE A
				min.	max. DC	max. AC	Watt DC	V.A. AC		main code
<b>3/2 normally closed (NC)</b> 		0.8	0.5	0	30	30	10	21.5	13.5	<b>Q3B108</b>
		1.2	1.3	0	25	25	10	21.5	13.5	<b>Q3B112</b>
		1.6	1.7	0	15	15	10	21.5	13.5	<b>Q3B116</b>
		2.4	3.5	0	10	10	10	21.5	13.5	<b>Q3B124</b>
		3.0	4.5	0	6	6	10	21.5	13.5	<b>Q3B130</b>
<b>3/2 normally open (NO)</b> 		0.8	0.5	0	20	20	10	21.5	13.5	<b>Q3B208</b>
		1.2	1.1	0	15	15	10	21.5	13.5	<b>Q3B212</b>
		1.6	1.4	0	10	10	10	21.5	13.5	<b>Q3B216</b>
		2.4	3.0	0	6	6	10	21.5	13.5	<b>Q3B224</b>
		3.0	3.5	0	4.5	4.5	10	21.5	13.5	<b>Q3B230</b>

\*l/min. of water with  $\Delta P$  of 1 bar

order code

**Q** **3** **B** . **A** . **6**

main code
see table A on this page

seals	
code	material
<b>B</b>	NBR
<b>V</b>	FPM
<b>E</b>	EPDM

manual override	
code	type
<b>0</b>	none
<b>1</b>	brass screw
<b>2</b>	palm button
<b>3</b>	push button

coil code
see table B on page 2/2



# FLO CONTROL

Solenoid Valves



direct operated solenoid valves

coil 31 mm

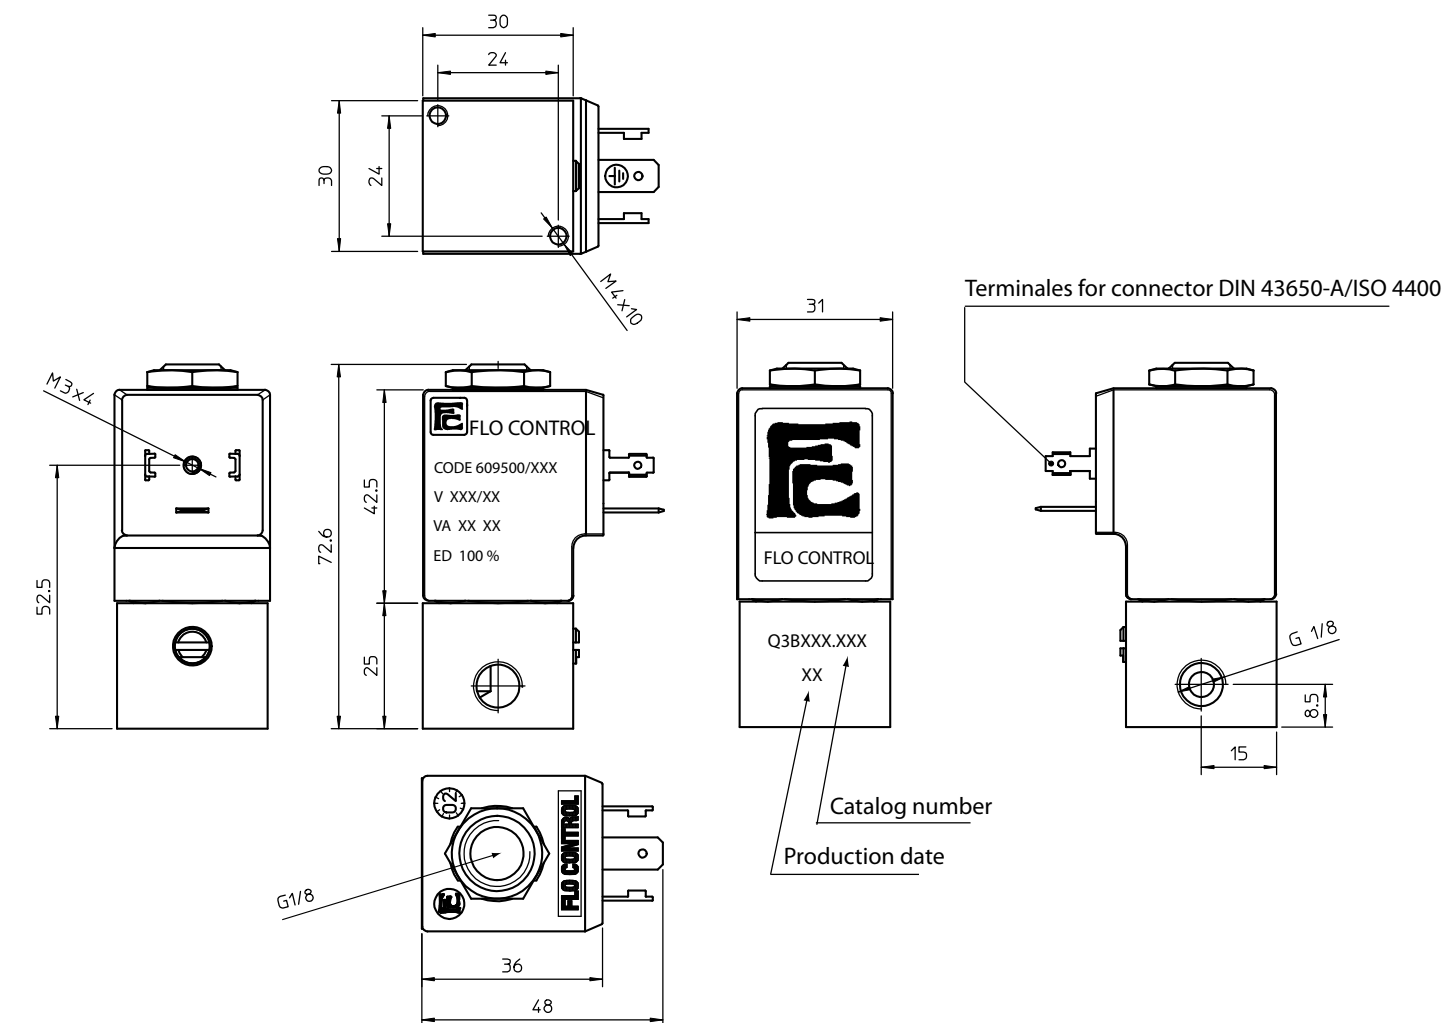

<b>weight</b>	220 g
---------------	-------

coil code	TABLE B			
	*voltages	code		
		~ 50 Hz	~ 60 Hz	= DC
	12	-	-	666
	24	611	644	671
	48	616	-	676
	110	621	-	681
	115	-	653	-
	220	631	-	-
	230	638	659	-
	380	640	-	-

coil specification	
wire insulation	class H180° C
encapsulation	class F155° C
encapsulation mat.	nylon
energising duration	100% at +20° C ambient
voltage tolerance	- 10% +15% of nominal voltage
*power consumption	AC 13,5 VA - DC 10 Watt
electrical connection	DIN 43650/A (2P+ earth)
cable connection	Pg 9 (for cable dia. 6-8mm)
protection class	IP 65 (with connector )

\* other voltages and wattages on request

**connector** (not included, must be ordered separately)

<b>code</b>	Z10031
-------------	--------

# FLO CONTROL

Solenoid Valves

