



Safety sensor eloProtect E 153ESK

Safety sensor 153ESK eloProtectE – our smallest. The RFID technology used in the eloProtectE sensors offers the user individual coding options. As a result, the tampering protection can be selected according to the application and increases the safety of the application.

The use of this new technology simplifies the mounting conditions through larger offset values.

The direct monitoring of large contactors via the EDM input is possible thanks to the integrated evaluation electronics and the high switching capacity. This means no additional safety modules are necessary.

Technical specifications

- Available connection types: cable outlet, M12 pigtail
- Contact form: OSSD
- Optional LED display (3-colour)
- Safety outputs: 2
- Diagnostic output: 1
- Safety inputs: 2
- Protection class IP6K9K (ISO 20653)
- Stand-Alone device (EDM input)
- Smallest special design on market
- Series connection with up to 30 sensors
- Fastest response time

Technical drawing

IMAGE 1/3

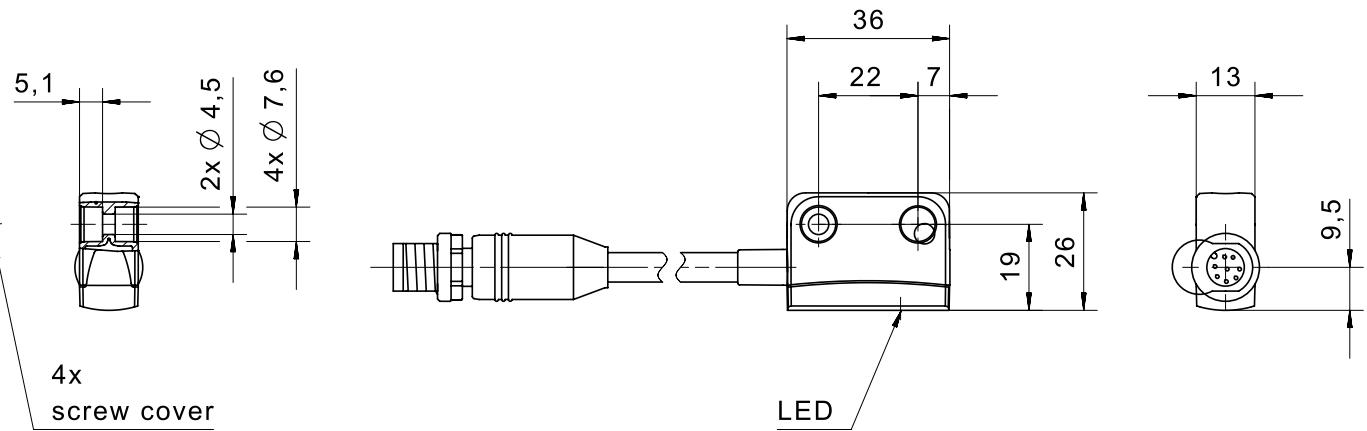
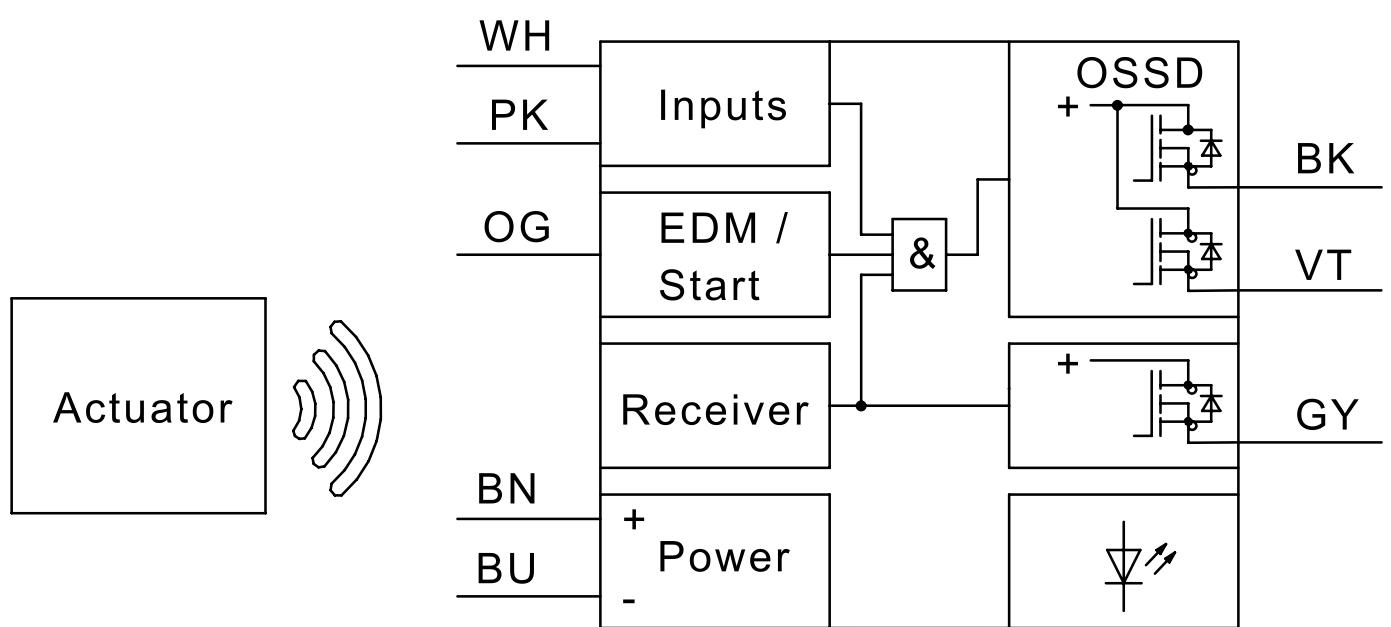
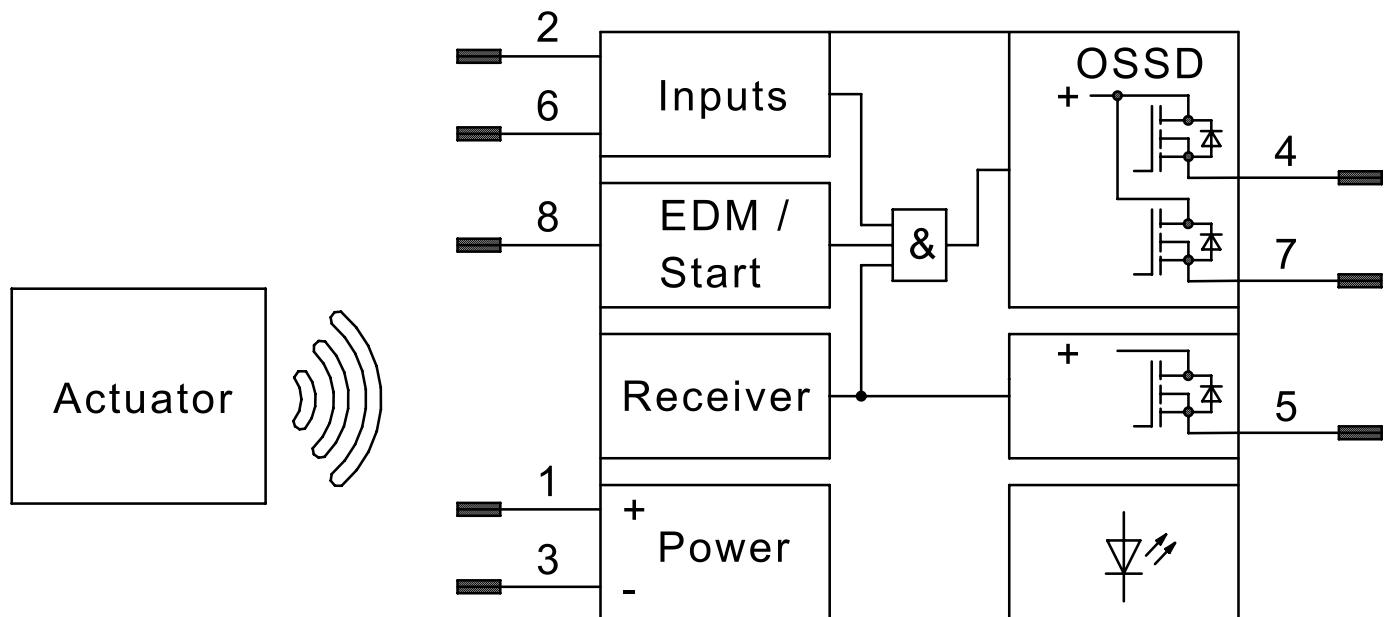


IMAGE 2/3

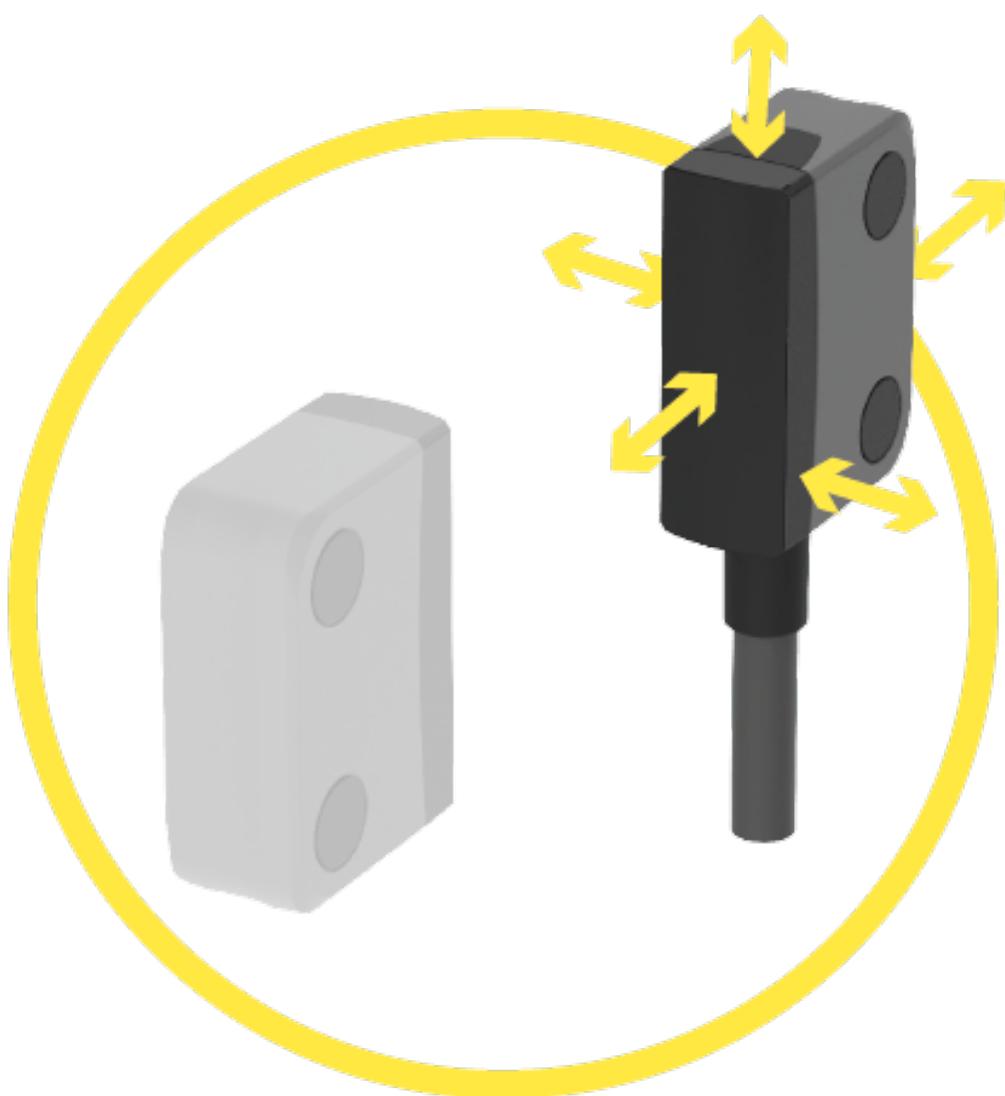


IMAGE 3/3



Product options

IMAGE 1/2



Suitable for actuation from any direction. Operating distance (Sao) 8 mm. Assured switch-off distance (Sar) 18 mm.

IMAGE 2/2

ORDERING KEY

153 ESK	00				Safety sensor, electronic, RFID
		K			Connection cable – PVC - 1m
		J			Connection pigtail – PVC – M12, 8-pin
		1			Standard-coded
		2			Unique (actuator included with sensor)
		3			Programmable
			1		EDM input automatic
			2		EDM input manual (start push button)
					Other available cable lengths (only with "K" at 9th position)
			-3		3 m
			-5		5 m
			-10		10 m
					Other cable materials, cable lengths and connector types on request

Article characteristics

Attribute	153ESK00J11	153ESK00J12	153ESK00J21	153ESK00J22	153ESK00J31	153ESK00J32 ▶
Max. switching current at safety output				0.4 A		
Max. switching current at control output				0.05 A		
Contact form				OSSD		
Switching frequency				3 Hz		
Assured switching distance (Sao)				8 mm		
Assured switch-off distance (Sar)				18 mm		
Minimum switching distance (S0 min)				0.5 mm		
Polarity reversal protection				yes		
Number of electronic safety outputs				2		
Number of electronic control outputs				1		
Number of safety inputs				2		
EDM/start input				yes		
Start function	automatic	monitored	automatic	monitored	automatic	monitored
Utilization category				AC-12 / DC-13		
No-load current IO				30 mA		
Rated operating voltage (Ue)				24 V		
Rated insulation voltage (Ui)				50 V		
Rated impulse withstand voltage (Uimp)				1000 V		
Current consumption per input				2.75 mA		
Power consumption				24 W		
LED display				three-coloured		
Actuation				arbitrary		
Switching principle				electronic		
Hysteresis				2 mm		
wurde angepasst (Number)				30		
Technology				RFID		

Article characteristics

Attribute	153ESK00J11	153ESK00J12	153ESK00J21	153ESK00J22	153ESK00J31	153ESK00J32 ▶
Coding variant	coded		unikat		individually coded	
Repeating accuracy			0,5 mm			
Rated switching distance (Sn)			12 mm			
Pollution degree			2			
Overshoot category			II			
Active surface (Number)			1			
Turn-on delay (ton)			75 ms			
Readiness delay (tv)			1000 ms			
Voltage drop (Ud)			0.75 V			
Stabilised PELV/SELV power supply			required			
Fuse operating voltage			1A fast			
Internal electronic fuse			yes			
Short-circuit detection			yes			
Cross-short detection			yes			
PL acc. to EN ISO 13849-1			e			
SIL acc. to IEC 61508			3			
SIL CL acc. to IEC 62061			3			
PFHD according to IEC 61508			2,24x10^-9 1/h			
Category acc. to EN ISO 13849-1			4			
Coding acc. to EN ISO 14119	Low			High		
Type acc. to EN ISO 14119			4			
Mission time in years			20 a			
Structure acc. to EN ISO 13849-1			Two-channel			
Hardware fault tolerance (HFT) according to IEC 61508			1			
Housing design			rectangular			
Dimensions			26 x 36 x 13 mm			
Free zone			50 mm			
Actuation frequency			180 1/h			

Article characteristics

Attribute	153ESK00J11	153ESK00J12	153ESK00J21	153ESK00J22	153ESK00J31	153ESK00J32 ▶
Minimum installation distance (between two sensors)				150 mm		
cannot be mounted flush				yes		
Housing material				PBT, PC		
Cable material				PVC		
Housing colour				grau, schwarz		
Protection class, connector				IP67 DIN EN 60529		
Operating temperature min.				-25 °C		
Max. operating temperature				70 °C		
Min. cable temperature range, moving				-5 °C		
Max. cable temperature range, moving				80 °C		
Min. cable temperature range, fixed installation				-30 °C		
Max. cable temperature range, fixed installation				80 °C		
Shock resistance (Norm)				30 g / 11 ms		
Vibration resistance (Norm)		10 ... 55 Hz			10...55 Hz	10 ... 55 Hz
Protection class, housing				IP67 DIN EN 60529 - IP6K9K ISO 20653		
Min. storage temperature				-25 °C		
Max. storage temperature				70 °C		
Continuous shock resistance (Norm)				10 g / 16 ms		
Relative humidity				5 - 85 %		
Air pressure				860 - 1060 hPa		
Delta tmax				0.5 °C/min		
Mounting type				screwed		
Weight				45 g		
Torque for fastening screws				0.7 N m		
Connector type				M12x1 - 8 polig		
Cable type				LiYY		
Cable length				0.15 m		
Number of strands				8		

Article characteristics

Attribute	153ESK00J11	153ESK00J12	153ESK00J21	153ESK00J22	153ESK00J31	153ESK00J32 ▶
Wire cross section	0.25 mm ²					
Cable colour	grau					
Certified in accordance with	EN ISO 13849-1 IEC 61508 IEC 62061 EN 60947- 5-3 UL 508 / CSA 22.5	EN ISO 13849-1 IEC 61508 IEC 62061 EN 60947- 5-3 UL 508 / CSA 22.7	EN ISO 13849-1 IEC 61508 IEC 62061 EN 60947- 5-3 UL 508 / CSA 22.9	EN ISO 13849-1 IEC 61508 IEC 62061 EN 60947- 5-3 UL 508 / CSA 22.11	EN ISO 13849-1 IEC 61508 IEC 62061 EN 60947- 5-3 UL 508 / CSA 22.13	EN ISO 13849-1 IEC 61508 IEC 62061 EN 60947- 5-3 UL 508 / CSA 22.15
CE label	yes					
Possible actuators	153EBK001					

Article characteristics

Attribute	153ESK00K11	153ESK00K12	153ESK00K21	153ESK00K22	153ESK00K31	153ESK00K32
Max. switching current at safety output				0.4 A		
Max. switching current at control output				0.05 A		
Contact form				OSSD		
Switching frequency				3 Hz		
Assured switching distance (Sao)				8 mm		
Assured switch-off distance (Sar)				18 mm		
Minimum switching distance (S0 min)				0.5 mm		
Polarity reversal protection				yes		
Number of electronic safety outputs				2		
Number of electronic control outputs				1		
Number of safety inputs				2		
EDM/start input				yes		
Start function	automatic	monitored	automatic	monitored	automatic	monitored
Utilization category				AC-12 / DC-13		
No-load current IO				30 mA		
Rated operating voltage (Ue)				24 V		
Rated insulation voltage (Ui)				50 V		
Rated impulse withstand voltage (Uimp)				1000 V		
Current consumption per input				2.75 mA		
Power consumption				24 W		
LED display				three-coloured		
Actuation				arbitrary		
Switching principle				electronic		
Hysteresis				2 mm		
wurde angepasst (Number)				30		
Technology				RFID		
Coding variant	coded		unikat		individually coded	
Repeating accuracy			0,5 mm			

Article characteristics

Attribute	153ESK00K11	153ESK00K12	153ESK00K21	153ESK00K22	153ESK00K31	153ESK00K32
Rated switching distance (Sn)				12 mm		
Pollution degree				2		
Ovvoltage category				II		
Active surface (Number)				1		
Turn-on delay (ton)				75 ms		
Readiness delay (tv)				1000 ms		
Voltage drop (Ud)				0.75 V		
Stabilised PELV/SELV power supply				required		
Fuse operating voltage				1A fast		
Internal electronic fuse				yes		
Short-circuit detection				yes		
Cross-short detection				yes		
PL acc. to EN ISO 13849-1				e		
SIL acc. to IEC 61508				3		
SIL CL acc. to IEC 62061				3		
PFHD according to IEC 61508				2,24x10^-9 1/h		
Category acc. to EN ISO 13849-1				4		
Coding acc. to EN ISO 14119	Low			High		
Type acc. to EN ISO 14119				4		
Mission time in years				20 a		
Structure acc. to EN ISO 13849-1				Two-channel		
Hardware fault tolerance (HFT) according to IEC 61508				1		
Housing design				rectangular		
Dimensions				26 x 36 x 13 mm		
Free zone				50 mm		
Actuation frequency				180 1/h		
Minimum installation distance (between two sensors)				150 mm		
cannot be mounted flush				yes		
Housing material				PBT, PC		

Article characteristics

Attribute	153ESK00K11	153ESK00K12	153ESK00K21	153ESK00K22	153ESK00K31	153ESK00K32
Cable material			PVC			
Housing colour			grau, schwarz			
Protection class, connector			-			
Operating temperature min.			-25 °C			
Max. operating temperature			70 °C			
Min. cable temperature range, moving			-5 °C			
Max. cable temperature range, moving			80 °C			
Min. cable temperature range, fixed installation			-30 °C			
Max. cable temperature range, fixed installation			80 °C			
Shock resistance (Norm)			30 g / 11 ms			
Vibration resistance (Norm)			10 ... 55 Hz			
Protection class, housing			IP67 DIN EN 60529 - IP6K9K ISO 20653			
Min. storage temperature			-25 °C			
Max. storage temperature			70 °C			
Continuous shock resistance (Norm)			10 g / 16 ms			
Relative humidity			5 - 85 %			
Air pressure			860 - 1060 hPa			
Delta tmax			0.5 °C/min			
Mounting type			screwed			
Weight			70 g			
Torque for fastening screws			0.7 N m			
Connector type			-			
Cable type			LiYY			
Cable length			1 m			
Number of strands			8			
Wire cross section			0.25 mm ²			
Cable colour			grau			
Certified in accordance with	EN ISO 13849-1 IEC 61508 IEC 62061 EN 60947-5-3 UL 508 / CSA 22.4	EN ISO 13849-1 IEC 61508 IEC 62061 EN 60947-5-3 UL 508 / CSA 22.6	EN ISO 13849-1 IEC 61508 IEC 62061 EN 60947-5-3 UL 508 / CSA 22.8	EN ISO 13849-1 IEC 61508 IEC 62061 EN 60947-5-3 UL 508 / CSA 22.10	EN ISO 13849-1 IEC 61508 IEC 62061 EN 60947-5-3 UL 508 / CSA 22.12	EN ISO 13849-1 IEC 61508 IEC 62061 EN 60947-5-3 UL 508 / CSA 22.14

Article characteristics

Attribute	153ESK00K11	153ESK00K12	153ESK00K21	153ESK00K22	153ESK00K31	153ESK00K32
CE label				yes		
Possible actuators				153EBK001		