

EX33000 Series

Industrial Unmanaged 16-port 10/100BASE Ethernet Switch



Overview

EtherWAN's EX33000 Series is an industrial unmanaged Fast Ethernet switching platform, designed for easy deployment in harsh environments.

The EX33000 Series is equipped with sixteen Fast Ethernet ports, or a combination of Fast Ethernet copper ports and two 100FX ports for long distance connectivity. Although unmanaged, the EX33000 is feature rich with full wire speed Fast Ethernet throughput, making the EX33000 Series a powerful network switch.

EtherWAN – "When Connectivity is Crucial."

Spotlight

• Industrial Grade

- Supports -10 to 60°C (14 to 140°F) operating temperature

• Versatile mounting Options

- Supports DIN-Rail, panel and rack mounting

• Fiber Connectivity

- Up to two 100BASE-FX ports with SC, ST and WDM options

Hardware Specifications

Technology

Standards

- IEEE 802.3, 10BASE-T
- IEEE 802.3u 100BASE-TX/100BASE-FX
- IEEE 802.3x Full duplex and flow control

Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps

Packet Buffer Memory

- 1.625M bits

Processing Type

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
- Auto MDI/MDIX

Address Table Size

- 4096 MAC addresses

Latency

- Less than 10µs

Power

Input

- Redundant power inputs:
12 to 48VDC (Terminal Block),
12VDC (DC Jack)

Power Consumption

- 7.4W Max. 0.6A@12VDC, 0.3A@24VDC, 0.15A@48VDC

Mechanical

Casing

- Aluminum Case
- IP30

Dimensions

- 69 x 110 x 135mm (W x D x H)
(2.72" x 4.33" x 5.31")

Weight

- 0.87Kg (1.92lbs.)

Installation

- DIN-Rail (Top hat type 35mm), Panel, or Rack mounting

Interface

Ethernet Ports

- 10/100BASE-TX: 16, 15 or 14 ports
- 100BASE-FX: 0, 1 or 2 ports

LED Indicators

- Per Unit: Power 1 (Green), Power 2 (Green), Power 3 (Green)
- Per Port: Link/Act

Alarm Contact

- One relay output with current 1A@24VDC

Environment

Operating Temperature

- -10 to 60°C (14 to 140°F)
Tested @ -20 to 70°C (-4 to 158°F)

Storage Temperature

- -40 to 85°C (-40 to 185°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)

Regulatory Approvals

ISO

- Manufactured in an ISO 9001 facility

EMI

FCC Part 15B Class A

VCCI Class A

EN 61000-6-4

EN 55022

EN 61000-3-2

EN 61000-3-3

Safety

UL 508

EMS

EN 61000-6-2

- EN 61000-4-2 (ESD Standards)
- EN 61000-4-3 (Radiated RFI Standards)
- EN 61000-4-4 (Burst Standards)
- EN 61000-4-5 (Surge Standards)
- EN 61000-4-6 (Induced RFI Standards)
- EN 61000-4-8 (Magnetic Field Standards)


Environmental Test Compliances

IEC 60068-2-6 Fc (Vibration)

IEC 60068-2-27 Ea (Shock)

FED STD 101C Method 5007.1 (Free fall w/package)

Dimensions

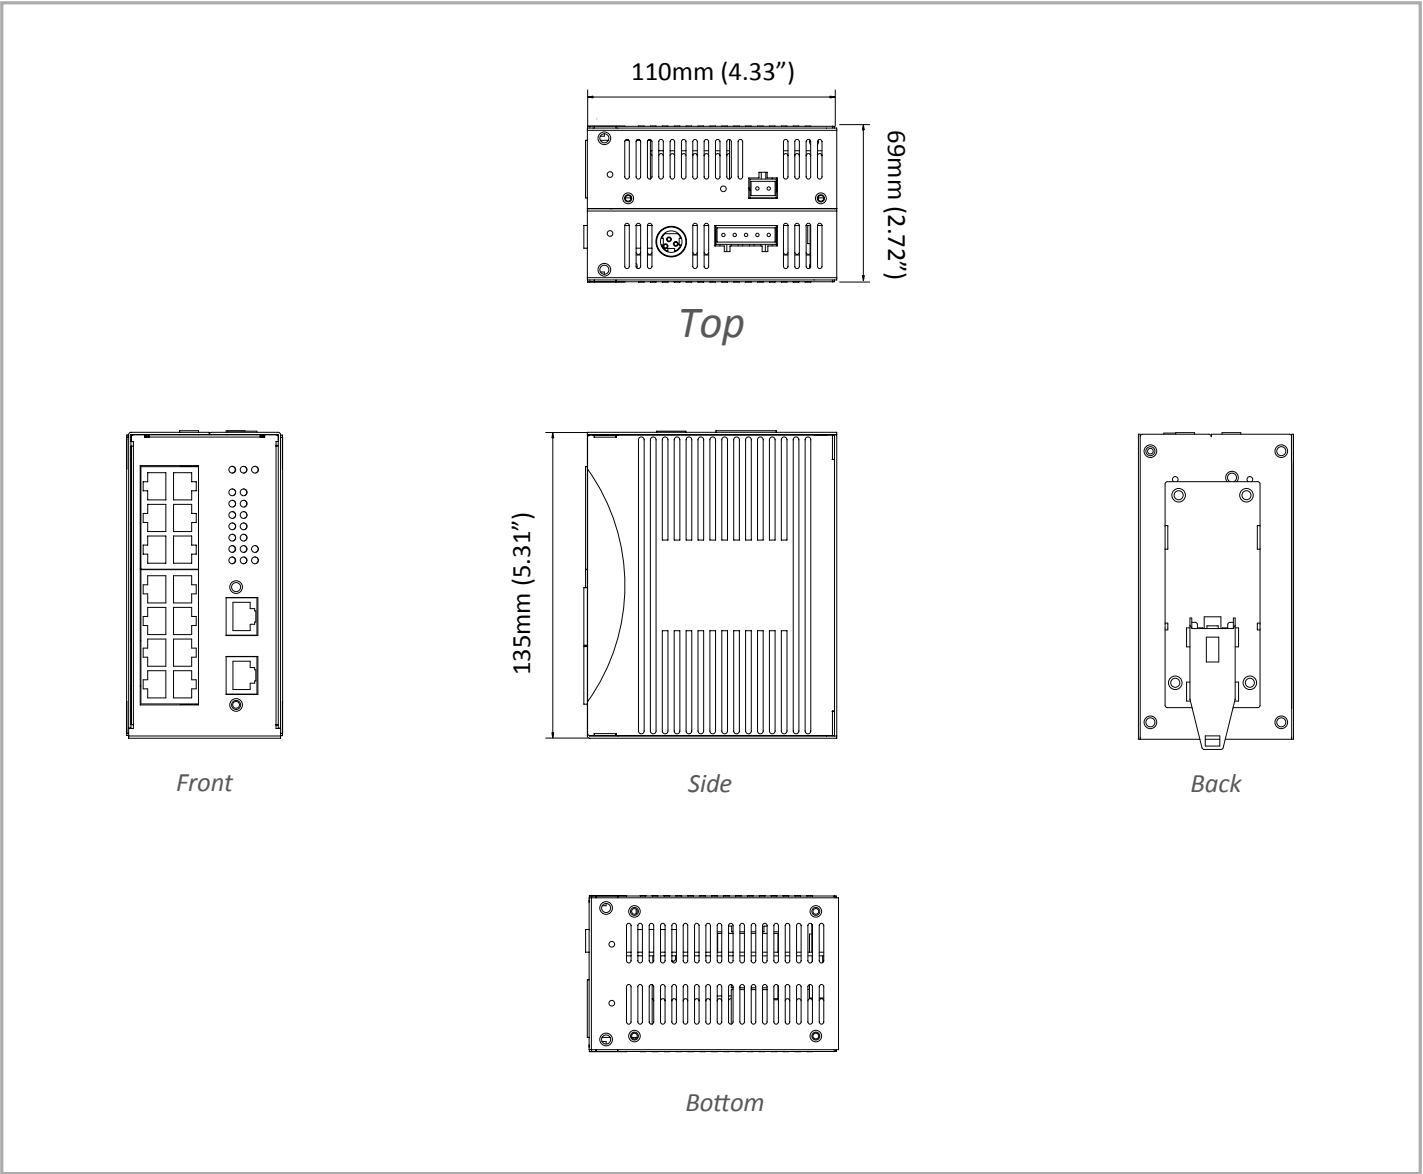

Ordering Information

Model	
EX33160-00B	16-port 10/100BASE-TX Industrial Unmanaged Ethernet Switch
EX33151-X0B	15-port 10/100BASE-TX +1-port 100BASE-FX Industrial Unmanaged Ethernet Switch
EX33142-X0B	14-port 10/100BASE-TX +2-port 100BASE-FX Industrial Unmanaged Ethernet Switch

* DIN-Rail mounting kit included.

Ordering Information - continued

100FX Fiber Options (X)

1	Multi Mode (SC) - 2Km
2	Multi Mode (ST) - 2Km
6	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-2Km
7	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-2Km
8	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-5Km
9	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-5Km
A	Single Mode (SC) - 20Km
B	Single Mode (SC) - 40Km
H	Single Mode (ST) - 20Km
P	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
Q	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km
R	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-40Km
S	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-40Km

Optional Accessories

KP-AA96-480	Panel Mounting Kit
KR-BK-43-400	Rack Mounting Kit
HDR-30-24	30W/1.5A DIN-Rail 24VDC Industrial Power Supply
HDR-60-24	60W/2.5A DIN-Rail 24VDC Industrial Power Supply
EDR-75-24	75W/3.2A DIN-Rail 24VDC Industrial Power Supply
EX41-145046-X	Power Supply 45W 12VDC with Open Wire (X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA
EX41-145044-X	Power Supply 45W 12VDC with Latch (X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA