



## Main

Range of product	Lexium SD3
Product or component type	Motion stepper drive
Device short name	SD326
Supply voltage limits	200...240 V 100...120 V

## Complementary

Format of the drive	Block
Phase	Single phase
[Us] rated supply voltage	100...120 V - 15...10 % 200...230 V - 15...10 %
Supply voltage type	AC/DC
Network frequency limits	50...60 Hz - 15...10 %
Communication interface	Pulse/Direction, Integrated
Function available	Rotation monitoring Holding brake monitoring
Maximum motor phase current	2.5 A
Current consumption	$\leq 0.2$ mA 24 V control voltage
Nominal power	180 W 115 V 270 W 230 V
Short-circuit current	0.5 kA
Associated fuse rating	6 A 115 V 6 A 230 V
Overvoltage category	III
Inrush current	60 A
Maximum leakage current	30 mA IEC 60990-3
Voltage state 0 guaranteed	$\leq 5$ V 24 V optocoupler input signals $\leq 0.5$ V 5 V optocoupler input signals
Voltage state 1 guaranteed	15...30 V 24 V optocoupler input signals 2.5...5.25 V 5 V optocoupler input signals

Input current	25 MA 5 V optocoupler input signals 7 MA 24 V optocoupler input signals
Maximum input frequency	200 KHz 24 V optocoupler input signals 200 KHz 5 V optocoupler input signals 400 KHz ENC_A/ENC_B signal input
Maximum switching voltage	30 V DC readiness signal output)
Maximum switching current	200 MA readiness signal output) 50 MA 24 V output signals)RM-FAULT_OUT 1.7 MA 24 V output signals)+BRAKE_OUT
Maximum voltage drop	<1 V 50 mA load 24 V output signals <1 V 50 mA load ENC+5V_OUT signal output <1 V 50 mA load readiness signal output
Physical interface	RS422 - ENC_A/ENC_B signal input
Output voltage	<= 30 V 24 V output signals) 4.75...5.25 V ENC+5V_OUT signal output)
Input voltage	24 V -15 %/+20 % 24 V control voltage
Residual ripple	<= 5 % 24 V control voltage)
Type of cooling	Natural convection
Maximum mechanical speed	3000 Rpm
Height	5.71 In (145 mm)
Width	2.83 In (72 mm)
Depth	5.51 In (140 mm)
Shock resistance	15 gn 11 ms EN/IEC 60068-2-27
Net Weight	2.43 Lb(US) (1.1 kg)

## Environment

Electromagnetic compatibility	Electrostatic discharge level 3 EN/IEC 61000-4-2 Immunity to electrical transients level 4 EN/IEC 61000-4-4 Immunity to radiated radio-electrical interference level 3 EN/IEC 61000-4-3 Voltage/Current impulse level 3 EN/IEC 61000-4-5
Standards	EN/IEC 61800-5-1 EN/IEC 61800-3 EN/IEC 61800-3 environment 2 EN/IEC 61800-3 environment 1 EN/IEC 50178
Product certifications	UL CUL
Marking	CE
Ambient air temperature for operation	32...104 °F (0...40 °C) UL 32...122 °F (0...50 °C)
Ambient air temperature for storage	-13...158 °F (-25...70 °C)
Pollution degree	Level 2
Relative humidity	5...85 % without condensation
Operating altitude	<= 3280.84 ft (1000 m) without derating > 3280.84...< 6561.68 ft (> 1000...< 2000 m) without derating maximum ambient temperature 40°C, no protective film, lateral distance of > 50mm)
Vibration resistance	1 gn 13...150 Hz)EN/IEC 60068-2-6 1.5 mm 3...13 Hz)EN/IEC 60068-2-6
IP degree of protection	IP20 On upper part IP40 without removal of protective film)

## Ordering and shipping details


Category	18285 - STEPPER DRIVES
Discount Schedule	PC55
GTIN	03389119224338
Nbr. of units in pkg.	1
Package weight(Lbs)	2.69 Lb(US) (1.22 kg)

Returnability	No
Country of origin	DE


### Packing Units

Unit Type of Package 1	PCE
Package 1 Height	5.31 In (13.5 cm)
Package 1 width	6.61 In (16.8 cm)
Package 1 Length	7.48 In (19 cm)
Unit Type of Package 2	S04
Number of Units in Package 2	6
Package 2 Weight	18.48 Lb(US) (8.381 kg)
Package 2 Height	11.81 In (30 cm)
Package 2 width	15.75 In (40 cm)
Package 2 Length	23.62 In (60 cm)
Unit Type of Package 3	S06
Number of Units in Package 3	24
Package 3 Weight	95.12 Lb(US) (43.144 kg)
Package 3 Height	28.94 In (73.5 cm)
Package 3 width	23.62 In (60 cm)
Package 3 Length	31.50 In (80 cm)


Dimensions

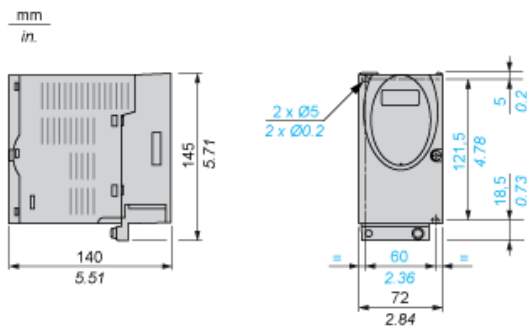

EMC mounting plate (included)




Mounting and Clearance

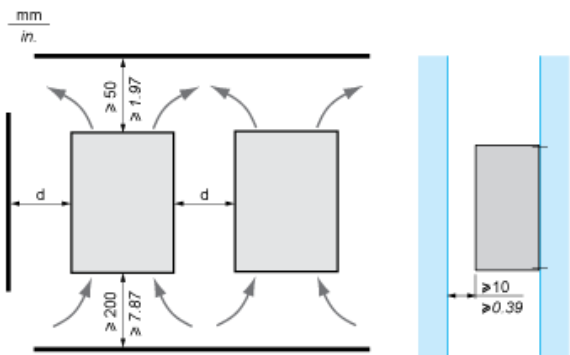

Ambient temperature	Mounting distances	Mounting recommendations	
		Without protective film (1)	With protective film
0 ... +40 °C	d > 50 mm/1.97 in.	None	None
d > 50 mm/1.97 in.	None	d > 10 mm/0.39 in.	
+40 ... +50 °C	d > 50 mm/1.97 in.	None	Reduce nominal and continuous current by 2.2 %
d > 50 mm/1.97 in.	Reduce nominal and continuous current	Operation not possible	
(1) Recommendation: remove protective film after installation.			

SD326 Connection Example

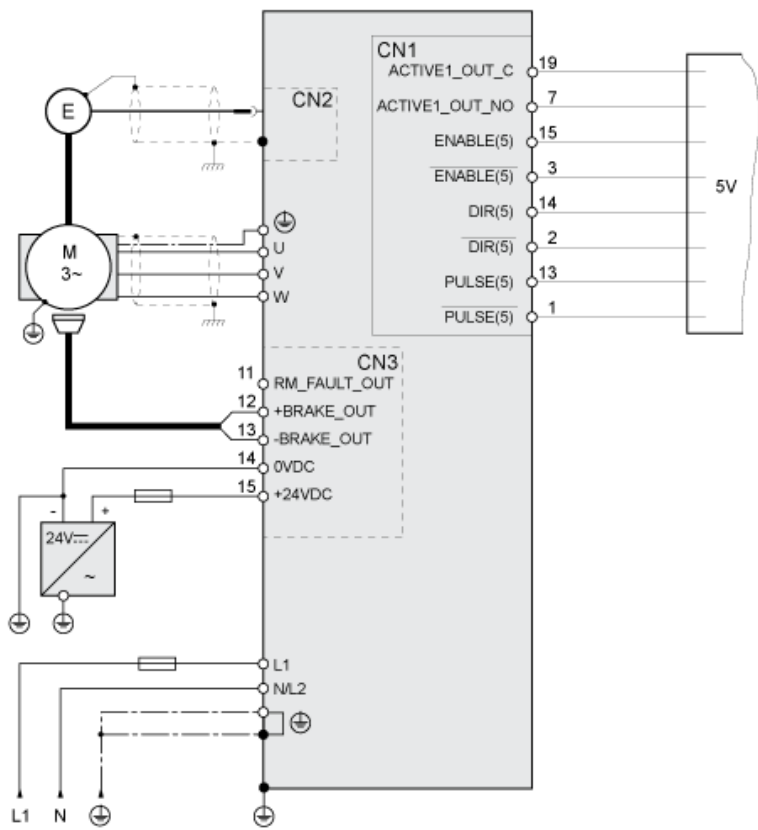

Product Life Status : Commercialised