



**GSR**


Ventiltechnik  
GmbH & Co. KG

# *Series* **2000**

*The "allround"  
valve system*

Innovative **Valve**  
Technology

# The 2/2 way,

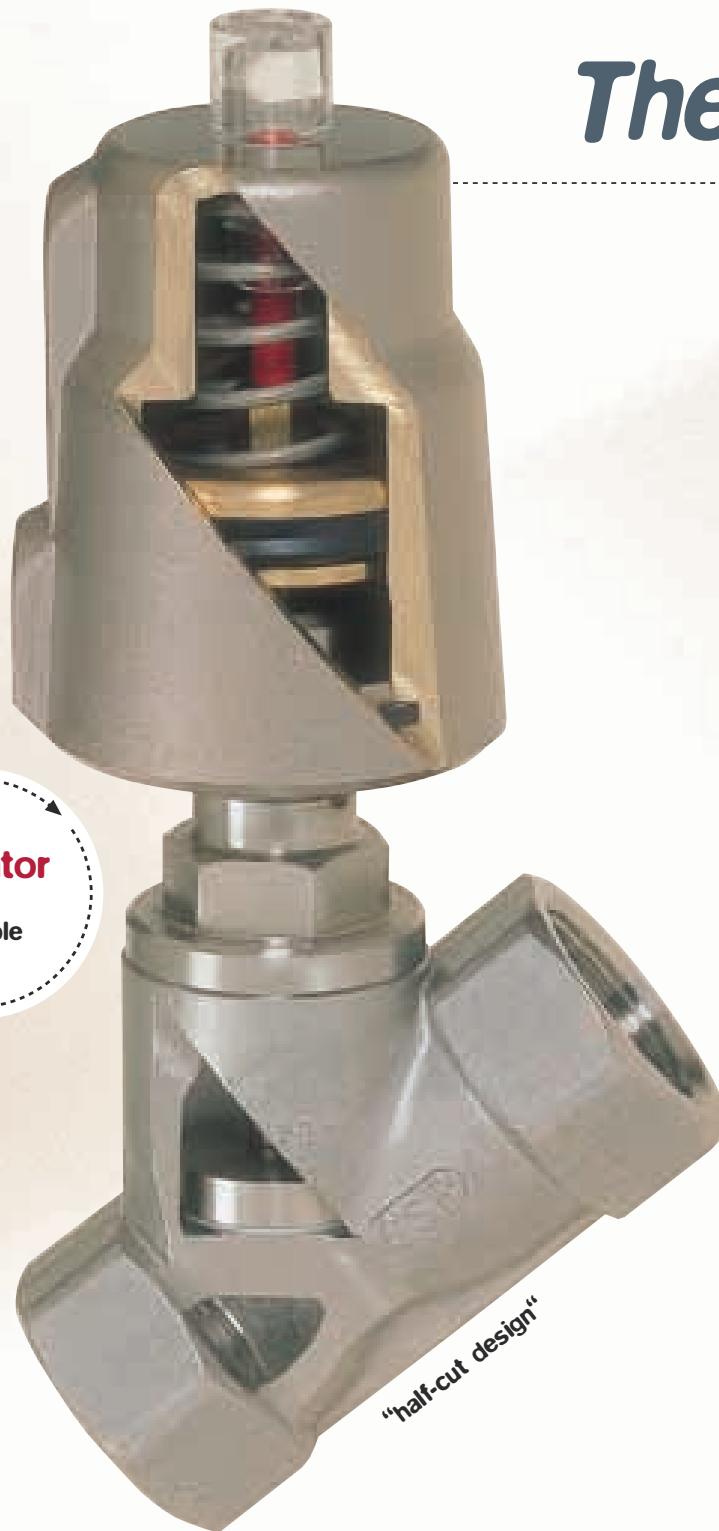

**Actuator**  
360°  
turnable

## Description:

This robust constructed valve series 2000 can be used for all kinds of neutral, gaseous and fluid media.

The stainless steel design is suitable for aggressive media.

This angle seat valve system is used in nearly all industry branches, due to its high lifetime (cycles) and easy service.

## Advantages:

- high flow rate
- suitable for high viscose and slightly polluted media
- maintenance free actuator (360°) turnable
- robust actuator
- temperature ranges from -10° C to +200° C
- high lifetime (cycles)
- visual/mechanical position indicator
- delivery "ex stock"

## Applications:

- filling/bottling systems
- "clean in place" systems
- chemical machinery
- mixing systems
- Food & drink industry
- cement/concrete systems
- water treatment/purification „units
- general process engineering



# angle-seat valve system

The multi-purpose, angle seat valve system

## Series 2000

Partner number code system:

**2000**

Series

**D**

Connection

**D** = G 1/2  
**E** = G 3/4  
**F** = G 1  
**G** = G 1 1/4  
**H** = G 1 1/2  
**I** = G 2

**8**

Body/  
Seal material

**1** = Red brass/NBR  
**4** = Red brass/PTFE  
**8** = st. steel/PTFE

**0**

Flow direction

**0** = above seat  
**5** = under seat  
**6** = under seat  
(2 x springs)

**1**

Actuator

**1** = Ø 50 mm brass  
**5** = Ø 50 mm nickel  
plated brass  
**8** = Ø 80 mm aluminium

### Stainless steel

Pressure range:

2000D801	G 1/2	0-25 bar
2000D851	G 1/2	0-16
2000D805	G 1/2	0-25
2000D855	G 1/2	0-16
2000E801	G 3/4	0-20
2000E861	G 3/4	0-20
2000E805	G 3/4	0-20
2000E865	G 3/4	0-20
2000F801	G 1	0-16
2000F861	G 1	0-10
2000F805	G 1	0-16
2000F865	G 1	0-10
2000G801	G 1 1/4	0-9
2000G861	G 1 1/4	0-7
2000G805	G 1 1/4	0-9
2000G865	G 1 1/4	0-7
2000G808	G 1 1/4	0-25
2000H801	G 1 1/2	0-7
2000H861	G 1 1/2	0-6
2000H805	G 1 1/2	0-7
2000H865	G 1 1/2	0-6
2000H808	G 1 1/2	0-20
2000I801	G 2	0-4
2000I861	G 2	0-3
2000I805	G 2	0-4
2000I865	G 2	0-3
2000I808	G 2	0-12

### Red brass

Pressure range:

2000D101	G 1/2	0-16 bar
2000D151	G 1/2	0-16
2000D401	G 1/2	0-16
2000D451	G 1/2	0-16
2000E101	G 3/4	0-16
2000E161	G 3/4	0-16
2000E401	G 3/4	0-16
2000E461	G 3/4	0-16
2000F101	G 1	0-16
2000F161	G 1	0-10
2000F401	G 1	0-16
2000F461	G 1	0-10
2000G101	G 1 1/4	0-10
2000G161	G 1 1/4	0-7
2000G108	G 1 1/4	0-16
2000G401	G 1 1/4	0-10
2000G461	G 1 1/4	0-7
2000G408	G 1 1/4	0-16
2000H101	G 1 1/2	0-8
2000H161	G 1 1/2	0-6
2000H108	G 1 1/2	0-16
2000H401	G 1 1/2	0-8
2000H461	G 1 1/2	0-6
2000H408	G 1 1/2	0-16

Pressure range:

2000I101	G 2	0-4 bar
2000I161	G 2	0-4
2000I108	G 2	0-16
2000I401	G 2	0-4
2000I461	G 2	0-3
2000I408	G 2	0-16

Ex  
**stock**  
delivery