


Turnbuckle- Body Only



Fatigue Rated

HG-2510 BODY

- Heat treat by normalizing.
- Hot Dip galvanized.
- UNC threads
- Fatigue Rated.
- Meets the performance requirements of Federal Specifications FF-T-791b, Type 1, Form 1 - Class 2, except for those provisions required by the contractor.

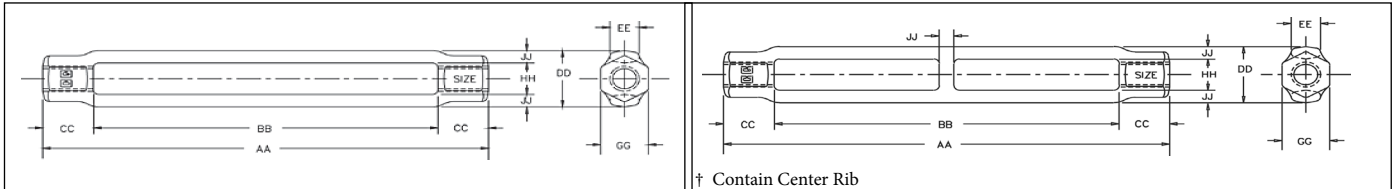

| Shank Dia. & Take Up (in.) | HG-2510 Stock No. | Working Load Limit (lbs) | Weight Each (lbs.) | Dimensions (in) | | | | | | | |
|-------------------------------------|----------------------|-----------------------------------|--------------------------|--------------------|-------|------|------|------|------|------|------|
| | | | | AA | BB | CC | DD | EE | GG | HH | JJ |
| * 1/4 x 4 | 1033893 | 500 | .15 | 4.87 | 4.07 | .40 | .72 | .34 | .50 | .38 | .17 |
| * 5/16 x 4-1/2 | 1033919 | 800 | .22 | 5.59 | 4.58 | .51 | .82 | .38 | .56 | .44 | .19 |
| * 3/8 x 6 | 1033937 | 1200 | .29 | 7.29 | 6.10 | .60 | .88 | .38 | .63 | .50 | .19 |
| 1/2 x 6 | 1033955 | 2200 | .70 | 7.70 | 6.03 | .84 | 1.19 | .68 | .81 | .63 | .28 |
| † 1/2 x 9 | 1033973 | 2200 | 1.03 | 11.03 | 9.36 | .84 | 1.19 | .68 | .81 | .63 | .28 |
| † 1/2 x 12 | 1033991 | 2200 | 1.27 | 14.03 | 12.36 | .84 | 1.19 | .68 | .81 | .63 | .28 |
| 5/8 x 6 | 1034017 | 3500 | 1.11 | 8.02 | 6.03 | 1.00 | 1.43 | .83 | 1.00 | .75 | .34 |
| † 5/8 x 9 | 1034035 | 3500 | 1.59 | 11.38 | 9.39 | 1.00 | 1.43 | .83 | 1.00 | .75 | .34 |
| † 5/8 x 12 | 1034053 | 3500 | 1.96 | 14.38 | 12.39 | 1.00 | 1.43 | .83 | 1.00 | .75 | .34 |
| 3/4 x 6 | 1034071 | 5200 | 1.50 | 8.26 | 6.13 | 1.07 | 1.74 | .94 | 1.13 | .94 | .40 |
| † 3/4 x 9 | 1034099 | 5200 | 2.17 | 11.72 | 9.59 | 1.07 | 1.74 | .94 | 1.13 | .94 | .40 |
| † 3/4 x 12 | 1034115 | 5200 | 2.66 | 14.72 | 12.59 | 1.07 | 1.74 | .94 | 1.13 | .94 | .40 |
| † 3/4 x 18 | 1034133 | 5200 | 3.63 | 20.66 | 18.53 | 1.07 | 1.74 | .94 | 1.13 | .94 | .40 |
| 7/8 x 12 | 1034179 | 7200 | 3.61 | 14.62 | 12.16 | 1.23 | 2.00 | 1.13 | 1.31 | 1.06 | .47 |
| † 7/8 x 18 | 1034197 | 7200 | 5.27 | 21.09 | 18.63 | 1.23 | 2.00 | 1.13 | 1.31 | 1.06 | .47 |
| 1 x 6 | 1034213 | 10000 | 3.32 | 9.00 | 6.18 | 1.41 | 2.45 | 1.25 | 1.50 | 1.25 | .60 |
| 1 x 12 | 1034231 | 10000 | 5.34 | 15.00 | 12.18 | 1.41 | 2.45 | 1.25 | 1.50 | 1.25 | .60 |
| 1 x 18 | 1034259 | 10000 | 7.35 | 21.00 | 18.18 | 1.41 | 2.45 | 1.25 | 1.50 | 1.25 | .60 |
| † 1 x 24 | 1034277 | 10000 | 9.85 | 27.66 | 24.84 | 1.41 | 2.45 | 1.25 | 1.50 | 1.25 | .60 |
| 1-1/4 x 12 | 1034339 | 15200 | 5.72 | 15.40 | 12.06 | 1.67 | 2.62 | 1.25 | 1.88 | 1.50 | .56 |
| 1-1/4 x 18 | 1034357 | 15200 | 7.58 | 21.40 | 18.06 | 1.67 | 2.62 | 1.25 | 1.88 | 1.50 | .56 |
| † 1-1/4 x 24 | 1034375 | 15200 | 9.45 | 27.96 | 24.62 | 1.67 | 2.62 | 1.25 | 1.88 | 1.50 | .56 |
| 1-1/2 x 12 | 1034437 | 21400 | 8.01 | 15.82 | 12.32 | 1.75 | 2.99 | 1.50 | 2.25 | 1.75 | .62 |
| 1-1/2 x 18 | 1034455 | 21400 | 10.4 | 21.82 | 18.32 | 1.75 | 2.99 | 1.50 | 2.25 | 1.75 | .62 |
| † 1-1/2 x 24 | 1034473 | 21400 | 12.9 | 28.45 | 24.94 | 1.75 | 2.99 | 1.50 | 2.25 | 1.75 | .62 |
| 1-3/4 x 18 | 1034552 | 28000 | 15.7 | 22.44 | 18.37 | 2.04 | 3.62 | 1.75 | 2.62 | 2.12 | .75 |
| 1-3/4 x 24 | 1034570 | 28000 | 19.2 | 28.44 | 24.37 | 2.04 | 3.62 | 1.75 | 2.62 | 2.12 | .75 |
| 2 x 24 | 1034632 | 37000 | 25.8 | 29.13 | 24.48 | 2.33 | 4.14 | 2.00 | 3.00 | 2.38 | .88 |
| 2-1/2 x 24 | 1034678 | 60000 | 55.9 | 31.66 | 24.60 | 3.53 | 5.62 | 2.75 | 3.88 | 3.12 | 1.25 |
| 2-3/4 x 24 | 1034696 | 75000 | 54.0 | 31.66 | 24.65 | 3.51 | 5.62 | 2.75 | 3.88 | 4.48 | 1.25 |

* Mechanical Galvanized

† Contains Center Rib for additional body support.

Rigging
Accessories