



—
your partner
in sensor
technology.



Datasheet EE680

**Air Velocity and Temperature
Sensor for Laminar Flow**



EE680

Air Velocity and Temperature Sensor for Laminar Flow

The EE680 is dedicated for precise measurement of the air velocity (A_v) and the temperature (T) in laminar flow. The GMP-compliant design is ideal for cleanrooms and safety cabinets in pharmaceutical, life sciences and microelectronics industries.

Outstanding Measurement Performance

The EE680 operates on the hot film anemometer principle. It employs an E+E thin-film sensing element which stands for excellent accuracy down to 0.1 m/s (20 ft/min), long term stability and low angular dependency. The multipoint air velocity factory adjustment leads to best performance over the entire working range. The E+E proprietary coating protects the sensing element against H_2O_2 and corrosive cleaning agents.

Versatility

The EE680 is available as straight and angled version with various probe lengths. The design is optimized for easy cleaning, while the mounting concept and the M12 stainless steel connector facilitate the installation and replacement. A led ring integrated in the stainless steel enclosure indicates the laminar flow conditions and the sensor status.

Analogue Outputs or RS485 Interface, User Selectable

The A_v and T measured data is available as current or voltage analogue outputs or on the RS485 interface with Modbus RTU protocol.

User Configurable and Adjustable


The setup and adjustment of the EE680 can be easily performed with an optional adapter and the free PCS10 Product Configuration Software.



EE680-T29 angled probe with flange



EE680-T15 straight probe with flange

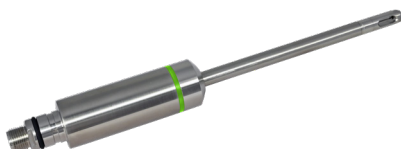

EE680-T15 straight probe without flange



EE680 mounting flange

Features



EE680 Sensor


- Highly accurate over the entire working range
- Precise measurement of even smallest air flow
- Combined Av and T measurement
- Voltage, current or digital RS485 output, selectable
- User configurable and adjustable

Probe and Sensing Element

- E+E sensor coating for best resistance against H_2O_2
- Stainless steel probe and sensing head

Visualization

- Optical indication of the laminar flow and sensor condition
- LED ring status directly visible on the sensor

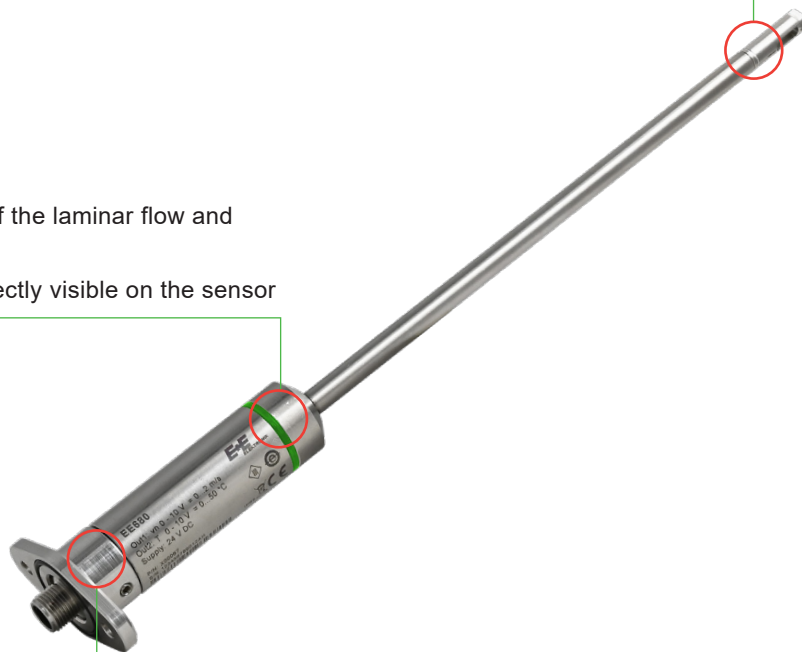

Application Specific Design

- GMP compliant design for easy cleaning
- Straight or angled probe with various lengths
- Stainless steel mounting flange
- M12 stainless steel connector

Inspection certificate

according to DIN EN 10204-3.1 with six Av points

Features

E+E Sensor coating

The E+E proprietary sensor coating is a protective layer applied to the active surface of the sensing element. The coating substantially extends the life-time and the measurement performance of the E+E sensor in applications with frequent H₂O₂ sterilization processes. Additionally, it improves the sensor's long term stability.

E+E Modular Sensor Platform

The EE680 is compatible with the Sigma 05 host device of the E+E Modular Sensor Platform. Together they become a versatile, plug-and-play Av/T modular sensor with analogue outputs and optional display. Besides EE680, Sigma 05 accommodates also other E+E intelligent sensing probes.




Sigma 05 with EE680

Dimensions


Values in mm (inch)

Type T15

Straight probe

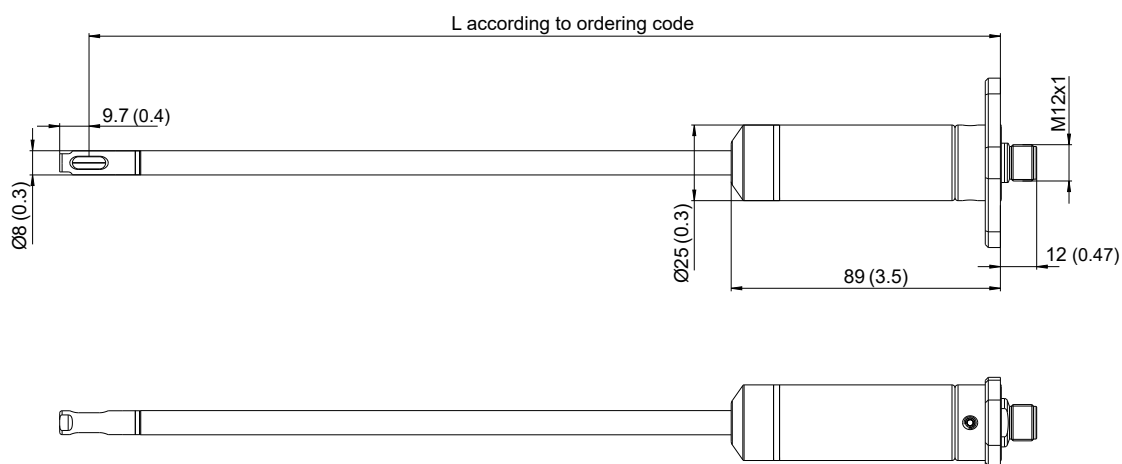


Mounting flange

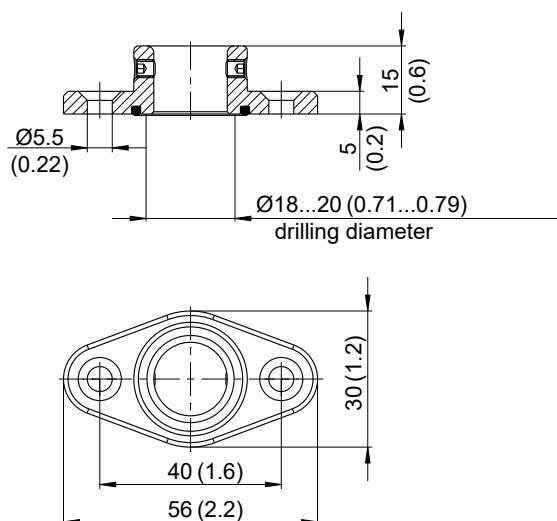

Type T29

90° angled probe

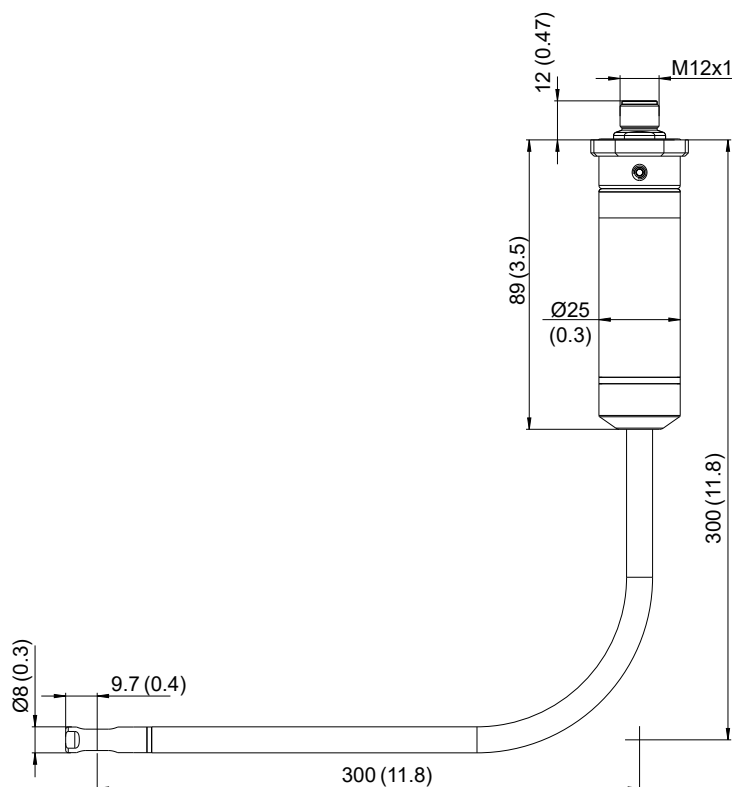

Technical Data

Measurands

Air Velocity (v)

Standard conditions factory setting	pn = 1 013.25 mbar (14.7 psi); Tn = 23 °C (73 °F), freely configurable via PCS10	
Measuring range	0...2 m/s (0...400 ft/min)	
Accuracy ¹⁾ in air @ 23 °C (73 °F) and 1013 hPa (14.7 psi)	0.1...2 m/s (20...400 ft/min): ± (0.5 % of mv +0.05 m/s)	mv = measured value
Dependency of inflow angle (α) of inflow direction	<3 % for α < ±10° <3 %	
Response time t ₉₀ , typ.	<1.5...40 s (Factory setting: 1.5 s, configurable via PCS10)	

1) The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor k=2 (2-times standard deviation).
The accuracy was calculated in accordance with EA-4/02 and with regard to GUM (Guide to the Expression of Uncertainty in Measurement).

Temperature (T)




Measuring range	-20...+70 °C (-4...+158 °F)
Accuracy , typ. in air @ 23 °C (73 °F), at air flows ≥ 0.45 m/s	±0.5 °C (±0.9 °F)

Outputs

Digital

Digital interface	RS485 (EE872 = 1/10 unit load)
Protocol Factory settings Supported Baud rates Measured data types	Modbus RTU 9600 Baud, parity even, 1 stop bit, Modbus address 68 9600, 19200, 38400, 57600, 76800 and 115200 FLOAT32 and INT16

General

Power supply class III  USA & Canada: Class 2 supply necessary	24 V DC ±20 %		
Current consumption , typ.	<30 mA		
Electrical connection	M12x1, 5 poles, stainless steel 1.4404		
Pressure working range	700...1300 hPa (10.2...18.9 psi)		
Storage conditions	-20...+70 °C 0...95 %RH, non-condensing		
Enclosure material	Stainless steel 1.4404		
Protection rating	IP65		
Electromagnetic compatibility	EN 61326-1 FCC Part15 Class A	EN 61326-2-3 ICES-003 Class A	Industrial environment
Conformity	 		
Configuration and adjustment	PCS10 Product Configuration Software (free download) and configuration adapter		

Ordering Guide

Feature		Description	Code			
Hardware Config.			EE680-			
	Type	Straight probe	T15		T15	
		90° angled probe		T29		T29
	Measuring range	0...2 m/s (0...400 ft/min)	No code			
	Probe length	200 mm (7.87")	L200		L200	
		300 mm (11.81")	L300	L300	L300	L300
Mounting	With flange	TG5				
Software-Setup (Analogue-) Outputs	Output signal ¹⁾	4 - 20 mA	GA6			
		0 - 20 mA	GA5			
		0 - 10 V	GA3			
		0 - 5 V	GA2			
		Digital interface RS485			No code	
	Output 1 measurand	Standardized air velocity ²⁾ vn [m/s]	No code			
		Standardized air velocity ²⁾ vn [ft/min]	MA23			
		Temperature T [°C]	MA1			
		Temperature T [°F]	MA2			
	Output 1 scaling low	0	No code			
		Value	SALValue			
	Output 1 scaling high	2	No code			
		Value	SAHValue			
	Output 2 measurand	Temperature T [°C]	No code			
		Temperature T [°F]	MB2			
		Standardized air velocity vn [m/s]	MB22			
		Standardized air velocity vn [ft/min]	MB23			
	Output 2 scaling low	0	No code			
		Value	SBLValue			
	Output 2 scaling high	50	No code			
Value		SBHValue				
Protocol	Modbus RTU ³⁾			P1		

1) Applies to both outputs.

2) Standardized air velocity vn at standard conditions (factory setup): Tn = 23 °C (73 °F), pn = 1013.25 hPa (14.7 psi), settable via PCS10.

3) Factory settings: baud rate 9600, parity even, stop bits 1.

Order Example

EE680-T15L300TG5GA6

Feature	Code	Description
Type	T15	Straight probe
Measuring range	No Code	0...2 m/s (0...400 ft/min)
Probe length	L300	300 mm (11.81")
Mounting	TG5	With flange
Output signal	GA6	4 - 20 mA
Output 1 measurand	No code	Standardized air velocity v_n [m/s]
Output 1 scaling low	No code	0
Output 1 scaling high	No code	2
Output 2 measurand	No code	Temperature T [°C]
Output 2 scaling low	No code	0
Output 2 scaling high	No code	50

EE680-T29L300TG5P1

Feature	Code	Description
Type	T29	90° angled probe
Measuring range	No code	0...2 m/s (0...400 ft/min)
Probe length	L300	300 mm (11.81")
Mounting	TG5	With flange
Output signal	No code	Digital interface RS485
Protocol	P1	Modbus RTU

Accessories

For further information see datasheet [Accessories](#).

Accessories	Code
Modbus configuration adapter	HA011018
E+E Product Configuration Software	PCS10
Protection cap M12 socket	HA010781
Protection cap M12 plug	HA010782
Connection cable M12 - flying leads	
1.5 m (4.9 ft)	HA010819
5 m (16.4 ft)	HA010820
10 m (32.8 ft)	HA010821
M12 Y adapter, M12 plug - 2 x M12 sockets, 5-polig	HA030204
M12 cable connector, 5 pole, for self assembly	HA010708
Mounting set EE680	HA011601
M12 sealing plug, stainless steel	HA011602