


Intelligent Quarter-Turn Actuator

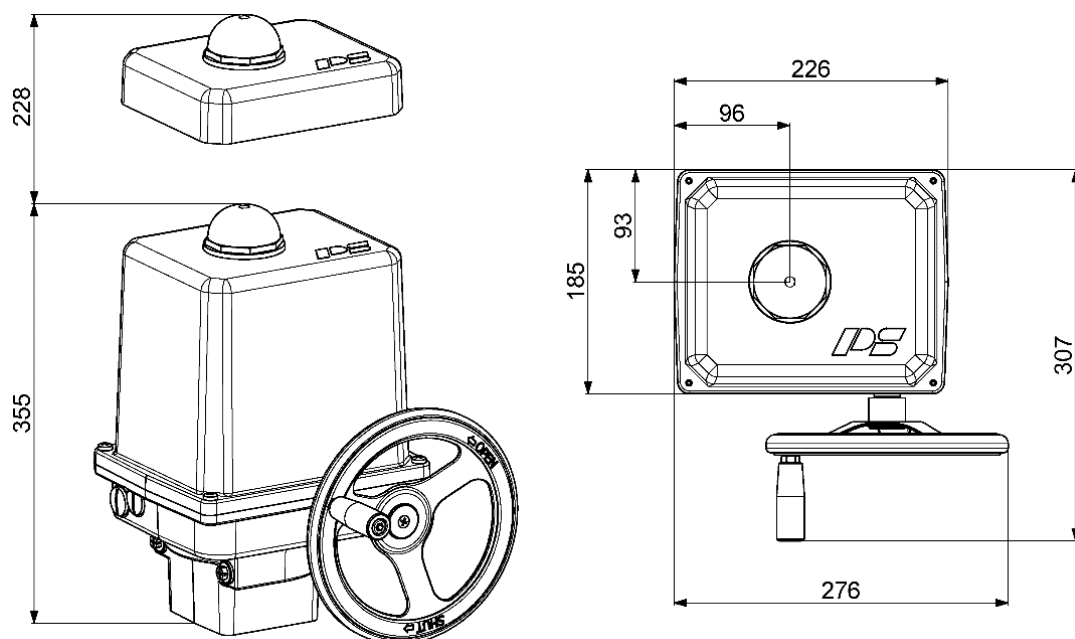

Approx. weight: 13 kg without accessories

**PSQ203
AMS1x**

**Positioner
integrated**

125 - 250 Nm
Switching torque)¹

16 s - 120 s
Op. Time/90°

**Flange
F07 + F10**

Modulating Actuator
Class C
acc. EN ISO 22153

Enclosure IP67
EN 60529

Operating Time/90°		60 - 120 s (adjustable)				PSQ203 AMS11
Power Supply	[V]	230 VAC 1~	115 VAC 1~	24 VAC/DC	360...575 VAC 3~) ²	
Normal Current) ⁴	[A]	0.24	0.48	2.3(AC) / 1.4(DC)	0.17) ³	
Maximum Current) ⁴	[A]	0.31	0.62	3.0(AC) / 1.9(DC)	0.2) ³	
Power Consumption) ⁵	[W]	41	41	38(AC) / 34(DC)	45) ³	
Operating Time/90°		16 - 32 s (adjustable)				PSQ203 AMS12
Power Supply	[V]	230 VAC 1~	115 VAC 1~	24 VAC/DC	360...575 VAC 3~) ²	
Normal Current) ⁴	[A]	0.59	1.2	5.6(AC) / 3.5(DC)	0.42) ³	
Maximum Current) ⁴	[A]	0.76	1.5	7.3(AC) / 4.6(DC)	0.5) ³	
Power Consumption) ⁵	[W]	115	115	108(AC) / 84(DC)	110) ³	
Standard		Description				Standard Equipment
Ambient Temperature	[°C]	-20 to +60 °C				
Motor Protection		electronic motor current monitoring with safety cut-off				
Overvoltage category		II				
Break away force		adjustable up to +50% nominal force				
Duty Cycle	IEC 60034-1,8	S2 30 min S4 50% ED @ 25°C				
Set value and Feedback		current 0 (4)... 20 mA, voltage 0 (2)... 10 V adjustable, split-range operation possible				
Binary control		24 V - 230 V for ON/OFF control (min. duration of pulse 1s)				
Valve Positioner Function		deadband adjustable from 0.5 .. 5%, shut-off minimum at torque switching				
Automatic Start-up		Recognizing the end position(s) and autoscaling set and feedback values				
Internal Fault Monitoring		Torque, set value, temperature, power supply, deviation of end positions, adjustable actions and signalisation				
Fault Indication Relay	FIR	potential-free opening contact provides a freely definable collective fault signal				
Diagnostics Function		Stores number of motor starts, motor and total running time. Rolling data storage of set value, feedback value, torque, temperature and status				
Communication Interface		for parametrisation and diagnosis with USB data cable and software PSCS				
Cable Glands		2 threaded holes ISO M20 x 1,5 (cable glands are not included)				

)¹ = Permissible average thrust over the entire travel is 50% of the max. thrust

)³ = at 400 V 3 phases and 50 Hz

)⁵ = at switching torque, data can change depending on accessories


)² = at nominal force

)⁴ = Data can change depending on accessories


Electrical Connection Plan

1-Phasen Wechsellspannung / DC 1-Phase AC / DC																	3-Phasen 3-Phase AC			
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	L1	L2	L3	PE
↑	↑	↑	↓	↓	↑	↑	↑	↑	↑	↑	↑	↑	↓	↑	↑	↑	↑	↑	↑	↑
+0(2) - 10 V	GND	+0(2) - 10 V	+0(4) - 20 mA	+0(2) - 10 V	GND	max. Last / max. Load 100 mA bei / at 24 VDC	24 V AC/DC - 230VAC	L+ AU/F OPEN	N/-	L+ ZU / CLOSE	L+ (24V AC/DC - 230VAC) (Option)	N/- (24V AC/DC - 230VAC) (Option)	21 - 40 VDC / 100 mA	+0(2) - 10 V	+0(4) - 20 mA	GND	400VAC	400VAC	400VAC	Schutzleiter / protective conductor
Sollwert- Eingang	Active Position- rückmeldung	Störmeldung potentialfrei	Binäre Ansteuerung	Netz- ausfall- signal	Ver- sor- gung	Istwert											Versorgungs- spannung	Versorgungs- spannung	Versorgungs- spannung	Schaltnetzteil
Set value input	Active position feedback	Monitor relay potential-free	Binary input signals	Fail safe signal	Supply	Actual value														
Galvanisch getrennt / Galvanically isolated 1 kV																	S-256-292_B			

Mounting Position

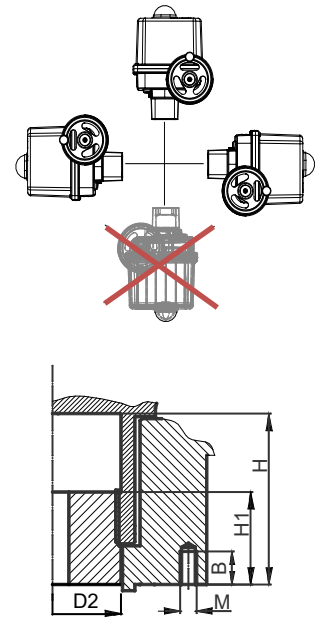

Available Drive Bushes

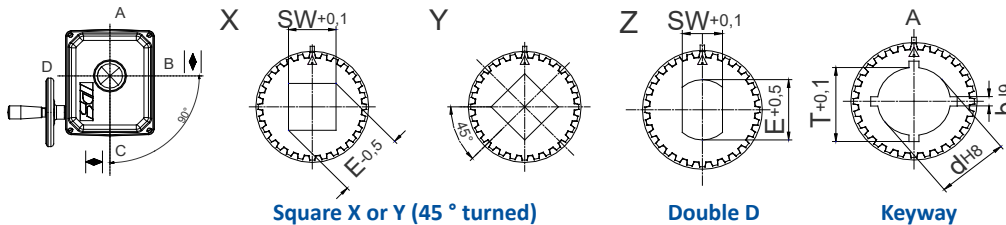

	F07	F10
D2	47	47
H	60	60
H1	35	35
M	M8	M10
B	16	20

Please check the drive bushes datasheet for the available sizes!
Other customized drive bushes on request!

Accessories/Options	Add'l Position Switches	2WE	Potential-free additional position switches with silver contacts (0.1 A - 10 A switching current)
	Add'l Position Switches Gold	2WE Gold	Potential-free additional position switches with gold contacts (0.1 mA - 100 mA switching current)
	Integrated process	PSIC	Enables the autonomous control of a process so that an external controller is not required
	Fail-Safe*	PSCP	Emergency power supply based on supercapacitors, safety position OPEN, CLOSED or free defined position
	Fieldbus Interface*		Digital transmission of nominal and actual value per mill or percent, report of monitoring and diagnostic data using Profibus DP (PSPDP) or CANOpen (PSCA) interfaces, additional interfaces available on request
	Local Control*	PSC.2	Illuminated display to show the actuator status and lockable selector to switch between modes: automatic, manual process ON/OFF, STOP and parameter menu. Control buttons for manual movement, menu operation and adjustment of parameters, display of diagnostic information
	Remote Local Control		mounting separately from the actuator (incl. 10 m connection cable)
	Data Cable	PSCS-USB	USB data cable enables the communication between the actuator and a PC by using the software PSCS
	Fail-Safe Port*	FSP	Signal port to drive to a „safety position“, selectable fail-safe position, standard 24 - 230 V
	Corrosion Protection	K2	Increased corrosion protection incl. heating resistor
	IP68		Increased enclosure IP68) ⁶
	Heating Resistor	HR	Heating resistor to prevent condensation
	Terminal Box*		Plug and socket in an IP68 box

*not retrofittable

⁶ = IP68, no ingress of dust and suitable for continuous immersion in water up to 6 m and 96 h